

Model 15S Shaft Style Size 15 (1.5")



Features

- Very High Performance Economical Encoder
- Low Profile- Less Than 1.0" (25.4 mm) Height and 1.5" (38 mm) Diameter
- Extended Temperature Operating Ranges Available
- Up To 12 Pole Commutation Optional (for brushless motor control)


The Model 15S Accu-Coder™ offers a high performance feedback solution in a low profile package, making the Model 15S ideal for commercial and light-duty industrial applications. This industry standard Size 15 (1.5" diameter) encoder features a precision bearing set, sealing available to IP64, a durable 1/4" or 6 mm stainless steel shaft, and a selection of servo, flange, and face mount options. The Model 15S may also be specified with features such as extended operating temperatures from -20° C to +120° C, or up to 12 pole commutation for brushless motor control. The Model 15S features EPC's Opto-ASIC circuitry for a clean, reliable signal. Its durable, yet economical design makes it an ideal encoder for high precision OEM applications.

Common Applications

Servo Motor Control, Robotics, Medical Diagnostic Equipment, Specialty Assembly Machines, Digital Plotters, Printers, Typesetting Equipment

Model 15S Ordering Guide

Blue type indicates price adder options. Not all configuration combinations may be available. Contact Customer Service for details.

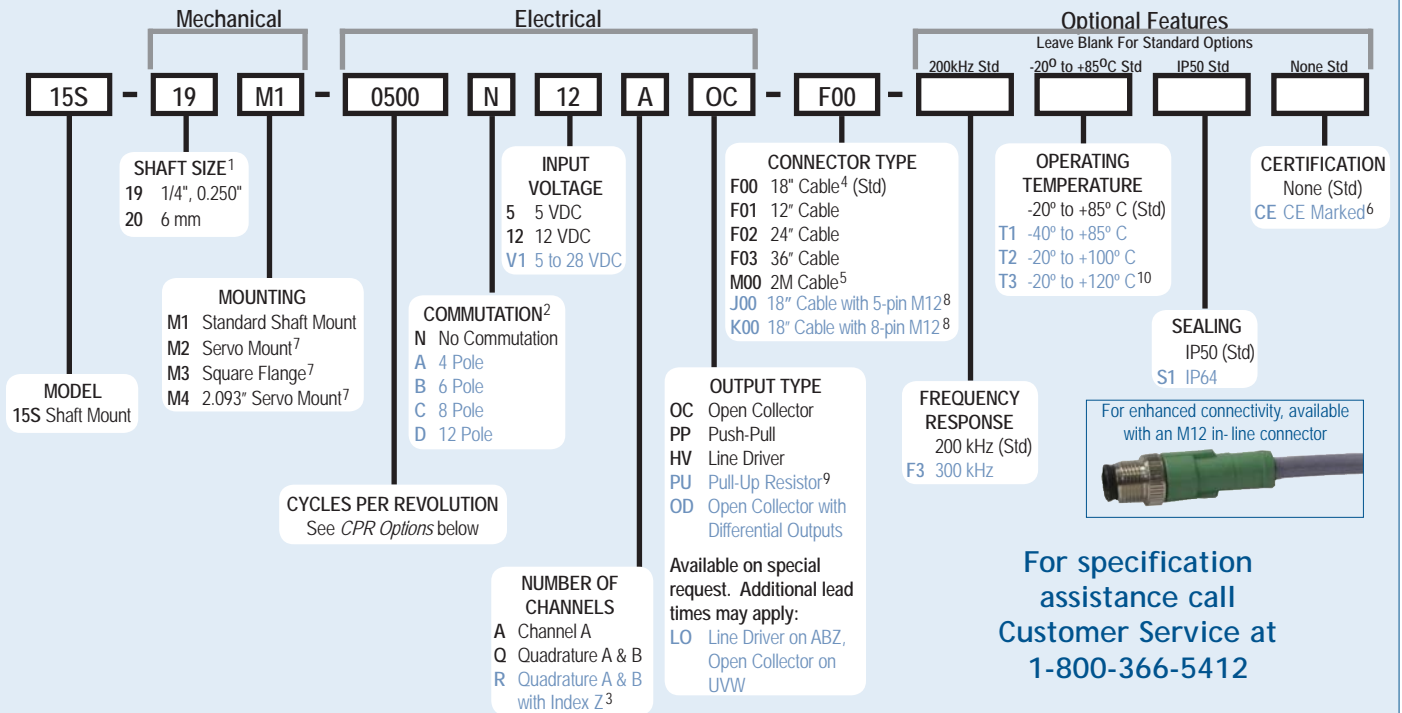

For specification assistance call
 Customer Service at
 1-800-366-5412

Model 15S CPR Options

| | | | |
|-----------------|------|------|------|
| 0001 thru 0189* | 0200 | 0250 | 0256 |
| 0300 | 0315 | 0360 | 0400 |
| 0512 | 0580 | 0600 | 0800 |
| 1024 | 1200 | 1250 | 1800 |
| 2048 | 2500 | 2540 | 2000 |

*Contact Customer Service For Availability

New CPR values are periodically added to those listed. Contact Customer Service to determine all currently available values. Special disk resolutions are available upon request and may be subject to a one-time NRE fee.

NOTES:

- 1 Contact Customer Service for additional options not shown.
- 2 Not available in all configurations, and not available with V1 Input Voltage. Contact Customer Service for availability.
- 3 Contact Customer Service for non-standard index gating or phase relationship options.
- 4 For non-standard English cable lengths enter 'F' plus cable length expressed in feet. Example: F06 = 6 feet of cable.
- 5 For non-standard metric cable lengths enter 'M' plus cable length expressed in meters. Example: M06 = 6 meters of cable.
- 6 Please refer to Technical Bulletin TB100: *When to Choose the CE Option* at www.encoder.com.
- 7 Only available with 0.250" shaft. (19)
- 8 Not available with commutation. 5-pin not available with line driver (HV, OD, LO) outputs.
- 9 With Input Voltage above 16 VDC, operating temperature is limited to 85° C.
- 10 Only available with 5 VDC Input Voltage

Model 15S Shaft Style Size 15 (1.5")

Model 15S Specifications

Electrical

- Input Voltage 5 VDC $\pm 10\%$ Fixed Voltage
12 VDC $\pm 10\%$ Fixed Voltage
4.75 to 28 VDC max for temperatures up to 85° C
4.75 to 24 VDC for temperatures between 85° to 100° C
- Input Current 100 mA max (65 mA typical) with no output load
- Output Format Incremental- Two square waves in quadrature with channel A leading B for clockwise shaft rotation, as viewed from the encoder mounting face. See *Waveform Diagrams* below.
- Output Types Open Collector- 20 mA max per channel
Push-Pull- 20 mA max per channel
Pull-Up- Open collector with 2.2K ohm Pull-Up
20mA max per channel
Line Driver- 20 mA max per channel (Meets RS 422 at 5 VDC supply)
- Index Once per revolution.
190 to 2540 CPR: Gated to output A
1 to 189 CPR: Ungated
See *Waveform Diagrams* below.
- Freq. Response 200 kHz standard, 300 kHz optional
- Noise Immunity Tested to BS EN61000-6-2; BS EN50081-2; BS EN61000-4-2; BS EN61000-4-3; BS EN61000-4-6, BS EN500811
- Symmetry 180° ($\pm 18^\circ$) electrical
Quad. Phasing 90° ($\pm 22.5^\circ$) electrical
Min. Edge Sep. 67.5° electrical
- Accuracy Within 0.017° mechanical or 1 arc-minute from true position. (for CPR>189)
- Commutation Up to 12 pole. Contact Customer Service for availability.
- Comm. Accuracy 1° mechanical


Mechanical

- Max Shaft Speed 8000 RPM. Higher speeds may be achievable, contact Customer Service.
- Shaft Material Stainless Steel
- Radial Shaft Load 5 lb max. Rated load of 2 to 3 lb for bearing life of 1.2×10^{10} revolutions
- Axial Shaft Load 5 lb max. Rated load of 2 to 3 lb for bearing life of 1.2×10^{10} revolutions
- Starting Torque IP50 0.05 oz-in
IP64- 0.4 oz-in
- Moment of Inertia 6.7×10^{-5} oz-in-sec² (4.8 gm-cm²)
- Max Acceleration 1×10^5 rad/sec²
- Electrical Conn 18" cable (foil and braid shield, 24 AWG conductors non-commutated, 28 AWG commutated), 5- or 8-pin M12 (12 mm) in-line connector with 18" cable (braid shield)
- Weight 3 oz typical


Environmental

- Operating Temp -20° to +85° C for standard models
-40° to +85° C for low temperature option
-20° to +100° C for high temperature option
-20° to +120° C for extreme temperature option
- Storage Temp -25° to +85° C
- Humidity 98% RH non-condensing
- Vibration 10 g @ 58 to 500 Hz
- Shock 80 g @ 11 ms duration
- Sealing IP50 standard; IP64 available


Model 15S Standard Shaft Mount (M1)

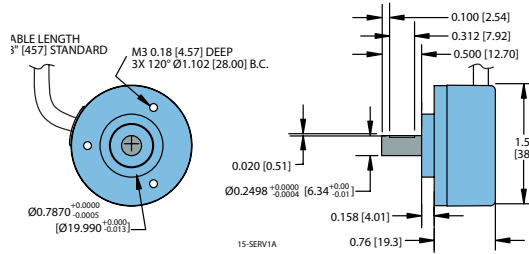


Model 15S Servo Mount (M2)

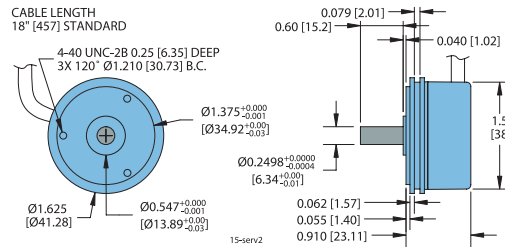

Model 15S 2.093" Servo Mount (M4)

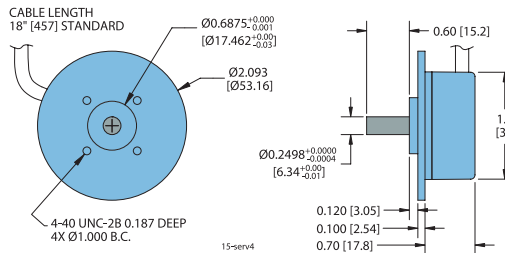


Model 15S Square Flange Mount (M3)

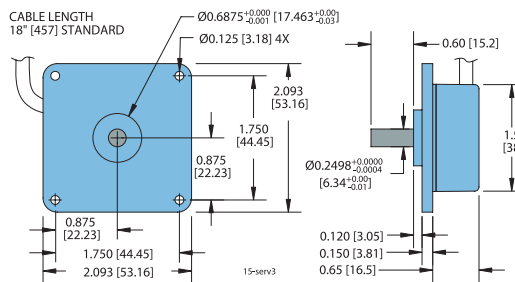

All dimensions are in inches with a tolerance of $\pm 0.005"$ or $\pm 0.01"$ unless otherwise specified
Metric dimensions are given in brackets (mm)

Waveform Diagrams

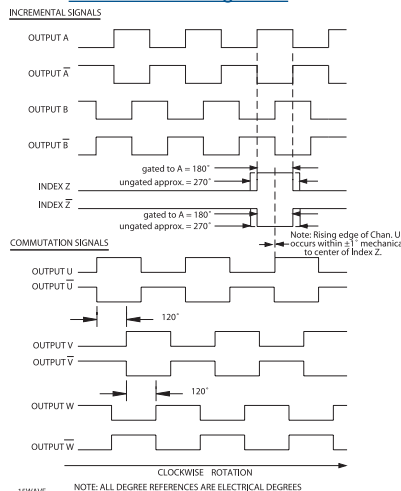

Wiring Table

| Function | Cable Wire Color | 5-pin M12** | 8-pin M12** | |
|----------|------------------|-------------|-------------|---|
| Com | Black | 3 | 7 | * CE Option: Cable shield (bare wire) is connected to internal case |
| +VDC | White | 1 | 2 | |
| A | Brown | 4 | 1 | **Non-CE Option: Cable shield is connected to M12 connector body. CE Option: Cable shield and M12 connector body is connected to internal case. |
| A' | Yellow | -- | 3 | |
| B | Red | 2 | 4 | |
| B' | Green | -- | 5 | |
| Z | Orange | 5 | 6 | |
| Z' | Blue | -- | 8 | |
| U | Violet | -- | -- | |
| U' | Gray | -- | -- | |
| V | Pink | -- | -- | |
| V' | Tan | -- | -- | |
| W | Red/Green | -- | -- | |
| W' | Red/Yellow | -- | -- | |
| Shield | Bare * | -- | -- | |