


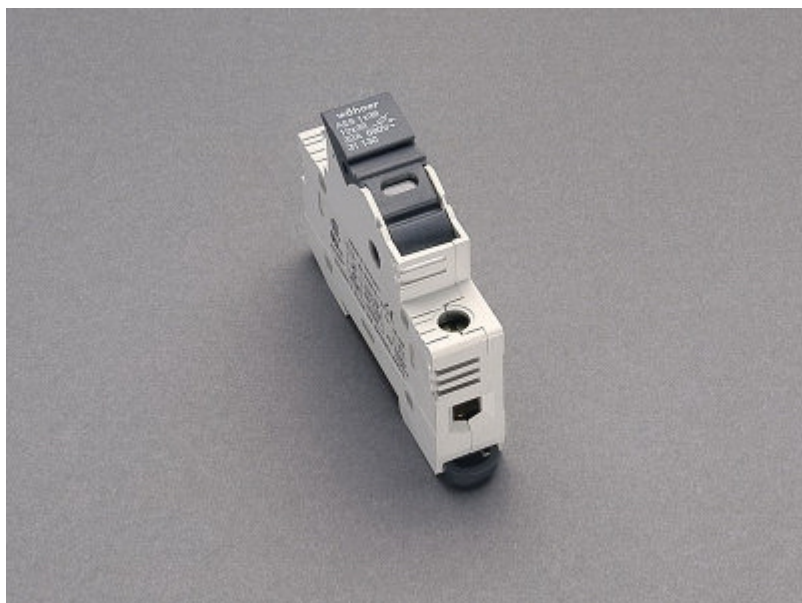

Art. No.: 31130
Ambus EasySwitch
holder for cylindrical fuses 10 x 38
1-pole
with luminous indication

Product Group : 17
Subgroup : 06

Standards :

IEC / EN 60947-3
IEC / EN 60269-2-1(III)
UL 512
CSA C22.2 No. 39

Approvals :

GOST, CCC, CSA, UL

Type No.: AES10x38
Duty Tariff No.: 8536 30 30

UL File Number: E230163, Category: IZLT2, www.ul.com
CSA File Number: 110285, Class Number: 3211-37, <http://directories.csa-international.org>
CCC certificate: 2004010302117258

Electrical Data :

IEC, EN : 32 A, 690 V (50-60 Hz)
UL, CSA : 30 A, 600 V (60 Hz)
rated insulation voltage : 800 V
utilisation category to IEC 60947-3
AC-22B (400 V)

Electrical Data :

conditional rated short circuit current 50 kA with fuse links gG

for fuse links to IEC 60269-2-1(III) with rated power dissipation:1

max. 3 W gG/gL

max. 1,2 W aM

luminous indication

range of operating voltage: 110 - 690 V AC / DC

Power dissipation at nominal current: 0,3 Watt

Mechanical Data :

Width x Height x Depth (mm): 18 x 81 x 58

Weight (kg/100): 6,5

Fastening method:

clip-on mounting

Connections :

box terminal :

1,5 - 25 mm² / AWG 14 - AWG 4

flexible cables, directly or with wire-end ferrule

Md 2,0 - 2,5 Nm / 18 - 22 lb.in.

(flexible cables of maximum cross-section may not fit when using wire-end ferrule)

Versions :


version without luminous indication : Art.Nr. 31110

Pack Size : 12

Catalog 2006 :

Page: 6/6

Accessories to Article 31130 :

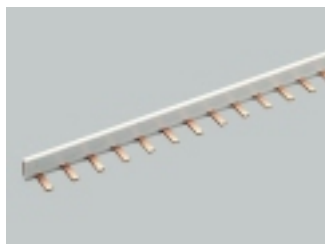

31101 comb type busbar, insulated, 1-pole, bridge type
75 A, pitch 27 mm, 1 m long



31103 connecting terminal, side connection
for comb type busbars pitch 18 mm

Accessories to Article 31130 :



31157 connecting terminal, front connection
for comb type busbars pitch 18 mm



31267 connection kit 10x38, 2-pole
for 10 2-pole combinations 10x38



31268 connection kit 10x38, 3-pole
for 10 3-pole combinations 10x38



31939 label for AES
100x 10 pcs.